

DLR-976-1500

High Brightness Diode-to-fiber Laser

NEW PRODUCT



Applications

- ▶ Optical Pumping
- ▶ Plastics Welding
- ▶ Metal Hardening
- ▶ Soft Soldering
- ▶ Brazing
- ▶ FPD Bonding
- ▶ Silicon Surface Modification

Features

- ▶ Output Power up to 1.5 kW
- ▶ High Brightness
- ▶ Modulated up to 50 kHz
- ▶ Stabilized Central Wavelength
- ▶ Narrow Emission Linewidth
- ▶ Compact and Low Cost
- ▶ High Wall-plug Efficiency
- ▶ Industrial Performance

IPG Photonics' DLR 976 Series is a newly developed high brightness diode laser system featuring a 976 nm wavelength stabilized narrow line diode-to-fiber laser. These industrial grade lasers are available in various power levels up to 1.5 kW.

IPG's advanced technology is based on the use of highly reliable entirely sealed single-emitter diodes. These diodes have an efficiency approaching 60%. IPG's DLR 976 diode laser is brighter, higher quality and more reliable than any other diode laser on the market. Air- or water-cooled, this compact DLR platform is cost-effective and virtually maintenance-free.

IPG's DLR 976 lasers are used in a number of materials processing applications including soft soldering, metal hardening, plastics welding, silicon surface modification and FPD bonding. The high brightness DLR 976 series is also an ideal source for optical pumping of various laser configurations.

DLR-976-1500

High Brightness Diode-to-fiber Laser

Optical Characteristics



Wavelength, nm	976 ± 1				
Linewidth FWHM, nm	0.5				
Wavelength Stability, nm	±0.2				
Mode of Operation	CW/ Modulated				
Modulation Frequency, kHz	≤50				
Average Power, W	100	300	600	1000	1500
Power Tunability, %	10-100				
Power Stability ¹ , %	± 1				
Optical Noise ² , % RMS	1				
Output Fiber Core Diameter, μm	110			200	
Output Fiber NA	<0.1				

¹ Over 4 hours, T= ±1°C

² 10 kHz - 20 MHz


General Characteristics

Dimensions, mm	448 x 403 x 132		448 x 580 x 132		448 x 677 x 177
Cooling	Air-cooled		Water-cooled		
Supply Voltage, VAC	100-240, 50-60 Hz		200-240, 50-60 Hz		
Power Consumption, W	<300	<900	<1800	<3000	<4500

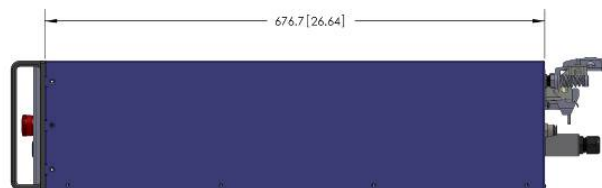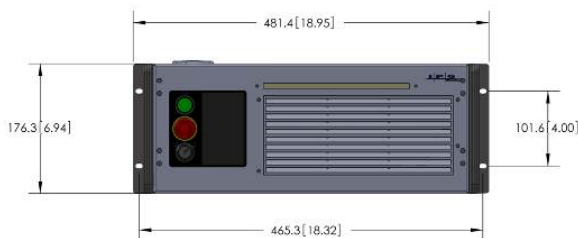

+1 (508) 373-1100
 sales.us@ipgphotonics.com
www.ipgphotonics.com

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2013-15 IPG Photonics Corporation. All rights reserved.

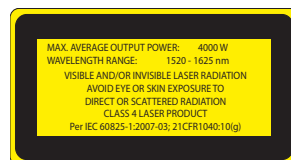

03

The Power to Transform®

rev. 01/15